# APH10T-ENC - Weatherproof horn speaker



Rated to IP66 with a steel U bracket the APH10T-ENC is a practical solution for most environments including car parks, courtyards and warehouses.

Designed for installation in outdoor or ambient temperature areas the APH10T-ENC provides a wide angle of sound coverage and is constructed with UL-940V0 plastic to prevent discoloring when used in direct sunlight.

### **Features and benefits**

- Up to 115dB(A) at 1 metre
- IP66 rated
- EN54-24 certified
- Simple U bracket mount
- Constructed from UL-94V0 plastic featuring UV inhibitors




6.3 Speakers

# **Technical specification**


| Code                      | APH10T-ENC  |
|---------------------------|---|
| Maximum Rated Power       | 10W   |
| Material                  | Low smoke zero halogen, UL-940V0 plastic with UV inhibitors |
| Colour                    | White RAL9016   |
| IP Rating                 | IP66  |
| Average S.P.L             | 95dB  |
| Net Weight                | 1.6Kg   |
| Temperature Range         | – 25°C to + 70°C  |
| Relative Humidity         | ≤95   |
| Effective Frequency Range | 340-16,000Hz  |
| Tappings @70V             | 5/2.5/1.25/0.625W   |
| Tappings @100V            | 10/5/2.5/1.5W   |
| Driver Impedance          | 8 Ohms  |

## **Dimensions**

| Description      | W (mm) | H (mm) | D(mm) |
|------------------|--------|--------|-------|
| Sound projectors | 172    | 131    | 227   |

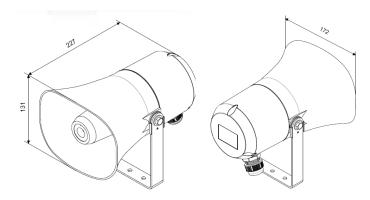

# **Circuit Diagram**



# **Catalogue numbers**

| Description               | Code       |
|---------------------------|------------|
| Weatherproof horn speaker | APH10T-ENC |