


Fire



DATA
SHEET

Addressable Callpoints

CBG370S / CBG370WP

MBG813 / MBG817

FXN501 / FXN503

COOPER

Addressable callpoints are available as both surface / flush and weatherproof versions and are approved to EN54: Pt 13.

All callpoints have integral short circuit isolators and have a status LED fitted as standard. To simplify replacement of glass element callpoints are fitted with fast fit clip on front covers.

Benefits and Features


- > Approved to EN54: Pt 11
- > Convenient clip fixed front cover
- > One key for test and cover removal
- > Available as surface / flush and weatherproof (IP67)




Technical Specifications

Model	CBG370S / MBG813 / FXN501	CBG370WP / MBG817 / FXN503
Description	Analogue addressable callpoint	Analogue addressable callpoint - weatherproof
CPD Approval	0832CPD0575	0832CPD0746
Configuration	addressable	
Rating	24V dc	
Connection	4-way terminal block	
Operating method	glass element with plastic safety film or resettable plastic element with integral alarm indicator	
Test facility	Unique key	
Environmental	IP42. -10°C to +55°C	IP67. -25°C to +55°C
Physical		
Construction	ABS	
Dimensions (W x H x D)	86mm x 86mm x 20mm(S) 53mm(F)	110mm x 110mm x 65mm
Weight	0.19kg	0.29kg

Wiring Diagram

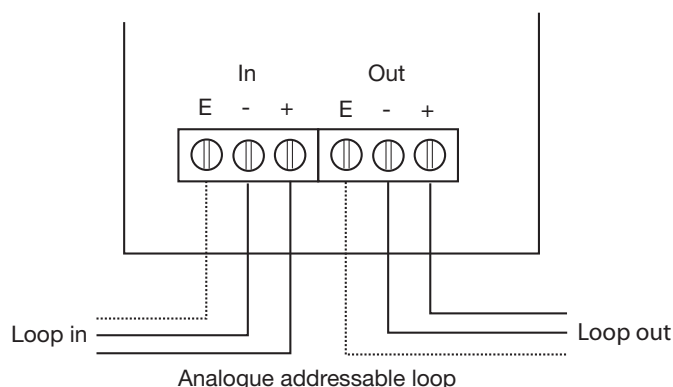

Fixing Centers

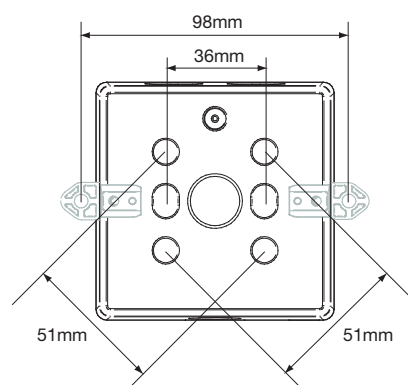

Product Codes

Conventional callpoint, surface/flush mounting	CBG370S / MBG813 / FXN501
Conventional callpoint, surface mounting, weatherproof	CBG370WP / MBG817 / FXN503
Accessories	
Callpoint test keys - pack of 10	MFBGKEY3
Resettable plastic elements - pack of 10	MBGREKIT
Polycarbonate front cover	CXCP / MBGHCC
Spare glasses - pack of 5	MBG118 / FX5G
Spare earth continuity links - pack of 5	MBG119
Mounting bezels - pack of 10	MBGBEZ
Spacer plates - pack of 10	MBGSP

Cooper Lighting and Safety

Wheatley Hall Road, Doncaster, South Yorkshire DN2 4NB

www.cooperfire.com

Sales

T: +44 (0)1302 303 999
F: +44 (0)1302 303 333
E: sales@cooperfire.com

Technical

T: +44 (0)1302 303 350
F: +44 (0)1302 303 332
E: techsupport@cooperfire.com

Export

T: +44 (0)1302 303 344
F: +44 (0)1302 303 345
E: export@cooperfire.com