

# RSSWP-2475W-FR & RSSWP-2475C-FW

Synchronised Strobes, Outdoor



RSSWP-2475C-FW -  
Synchronised Strobe, Ceiling Mounted, Outdoor



RSSWP-2475-FR -  
Synchronised Strobe, Wall Mounted, Outdoor



## Overview

The UL range of notification devices are designed to exceed your expectations and offer the most polished, feature rich and cost effective solution.

Both stylish and inspiring, architects and engineers can now specify the industry's sleekest looking fire notification appliance, while being afforded all the features and benefits that provide the industry's lowest total cost of ownership.


## Features

- Strobe Candela
  - 77°F (25°C) 180cd
  - -31°F (35°C) 75cd
- Voltage Range
  - 12 VDC 8.0-17.5
  - 24 VDC 16.0 - 33.0
- A combination of 12 and 24 VDC in one appliance providing the capability to use a single appliance for different installation requirements
- A universal, common base for retrofit jobs, limited space environments and pre-existing wire configurations. It comes complete with a Contact Cover for protection against dirt, dust, paint and damage to the contacts. The Contact Cover also

## Benefits

- Up to 48% savings in current draw over similar products, with the latest horn/strobe products you can install more appliances per a given circuit.

Dimensions

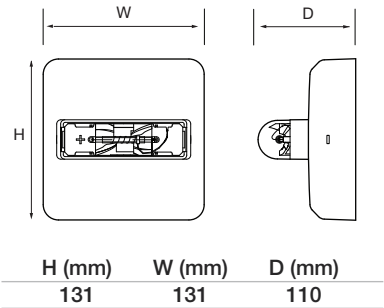

All strobe models are UL dual listed - meeting both UL1638 and UL1971 requirements. As dual listed appliances, these weatherproof strobes are listed for outdoor applications under UL 1638 as well as under UL 1971, the Standard for Safety Signaling Devices for Hearing Impaired. With an extended temperature range of -31°F to 150°F (-40°C to 66°C), the weatherproof appliances meet or exceed UL outdoor test requirements for rain, humidity and corrosion resistance while providing multiple strobe intensity options, including the highest strobe ratings available for area coverage per NFPA 72 strobe spacing tables (up to 185 candela for wall mounting and 177 candela for ceiling mounting).

Technical Specification

Code	RSSWP-2475W-FR	RSSWP-2475C-FW
Description	Synchronised Strobes, Wall Mounted, Outdoor	Synchronised Strobes, Ceiling Mounted, Outdoor
Standards	UL1638 & UL1971	UL1638 & UL1971
Operation	Synchronisation strobe 75 cd	Synchronisation strobe 75 cd
Environmental		
Operating Temperature	-40°C to 60°C	-40°C to 60°C
Humidity (Non Condensing)	0 to 95 %RH	0 to 95 %RH
Compatibility		
Suitable for use with	JSB UL fire systems	JSB UL fire systems

Candela Ratings

Candela Ratings				
Series	UL1971	UL1638 @ 77°F	UL1688 @ -40°F	Max Current
2475	30**	180	115	0.138

\*\* Wall mount rating only

Product Codes

Code	Description
RSSWP-2475W-FR	Synchronization Strobe, Wall Mount, Outdoor, 75cd
RSSWP-2475C-FW	Synchronization Strobe, Ceiling Mount, Outdoor, 75cd
WPSBB	Exposed Conduit, Surface Mount
WPSBB + WPKIT	Concealed Conduit, Surface Mount
WFP	Back Box, Flush Mount